

MDT009600C	80 x 160	SPI Interface	TFT Module
Specification			
Version: 1		Date: 11/08/2024	
Revision			
1	09/08/2024	First issue	

Display Features			
Display Size	0.96"		
Resolution	80 x 160		
Orientation	Portrait		
Appearance	RGB		
Logic Voltage	2.75V		
Interface	SPI		
Brightness	350 cd/m ²		
Touchscreen	CTP		
Module Size	14.00 x 28.00 x 2.02 mm		
Operating Temperature	-20°C ~ +70°C	Created By	Checked By
Pinout	8 way FFC	CL	TSB
Pitch	0.50 mm	Box Quantity	Weight / Display
		---	---

* - For full design functionality, please use this specification in conjunction with the ST7735V3 display driver specification.(Provided Separately)

Display Accessories	
Part Number	Description
MDIB-CC1	Interconnect board for standard pitch pinouts to fine pitch wires. Providing pinouts for 2.54 pinout. 1.27, 1, 0.845, 0.8, 0.7, 0.65, 0.62, 0.6, 0.5 & 0.3 pads.
MDIB-10W	10 way FFC/FPC to 10 way 2.54 and 1mm connector.

Optional Variants	
Appearances	Voltage




1. GENERAL SPECIFICATIONS

Item	Contents	Unit
LCD TYPE	TFT	
MODULE SIZE(W*H*T)	14.00*28.00*2.02	mm
ACTIVE SIZE(W*H)	10.800*21.696	mm
PIXEL PITCH(W*H)	0.153*0.153	mm
NUMBER OF DOTS	80*160	
DRIVER IC	ST7735V3	
INTERFACE TYPE	4W SPI	
RECOMMEND VIEWING DIRECTION	ALL	O'CLOCK
GRAY SCALE INVERSION DIRECTION		O'CLOCK
COLORS	262K	
BACKLIGHT TYPE	1-DIES WHITE LED	
TOUCH PANEL TYPE	WITHOUT	

DESIGN • MANUFACTURE • SUPPLY



2. EXTERNAL DIMENSIONS

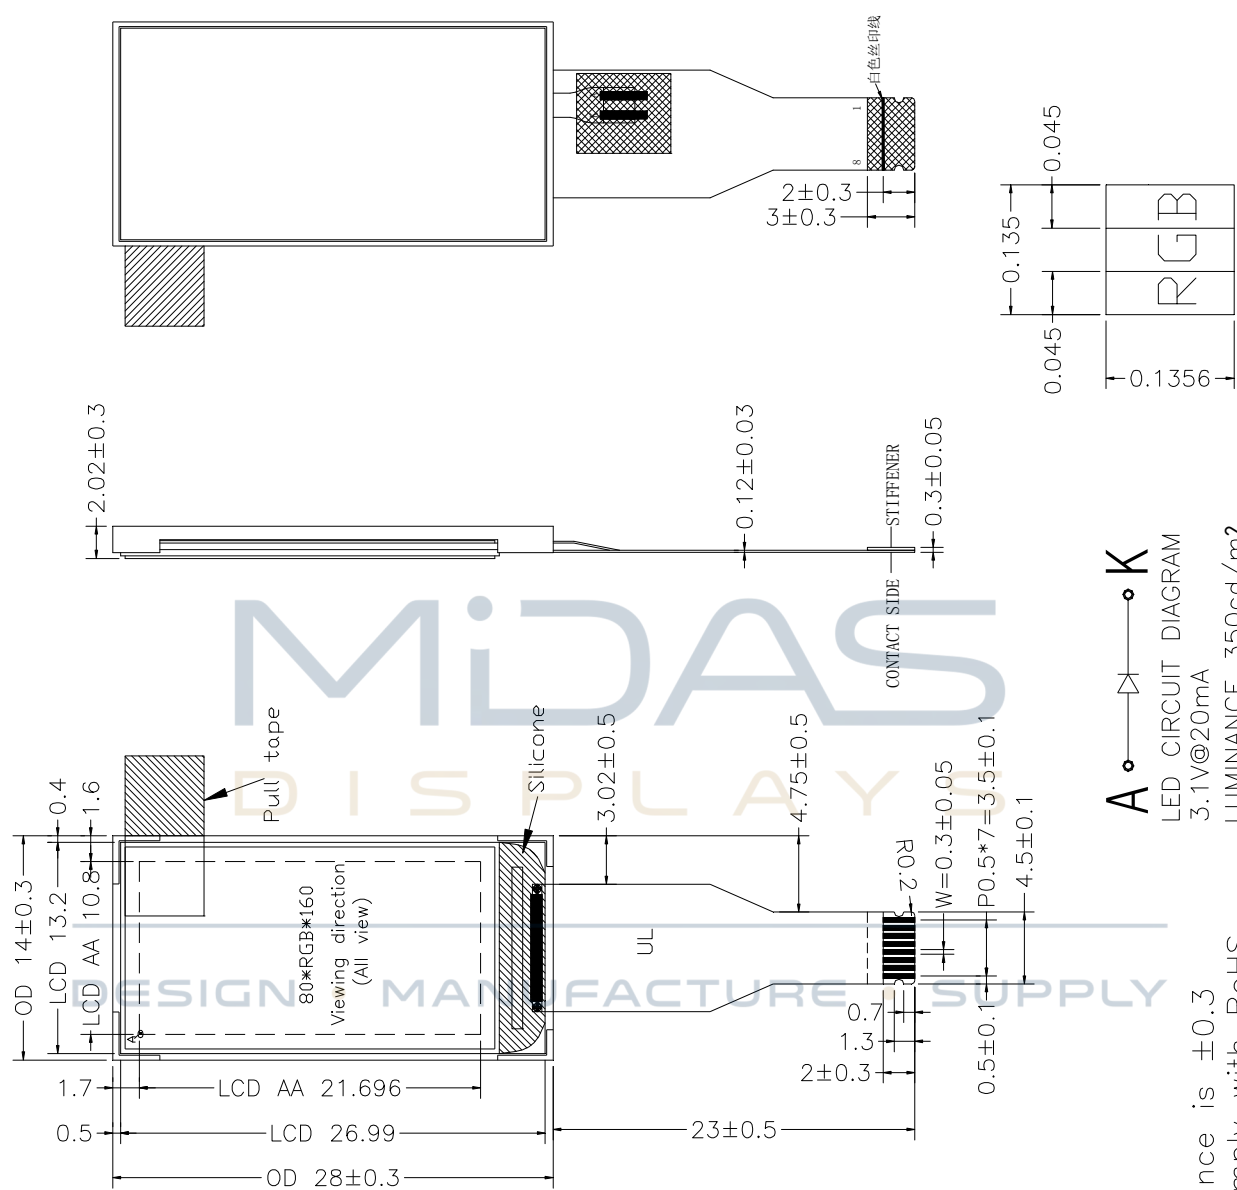

Remark:

- 1.Unmarked tolerance is ± 0.3
- 2.All materials comply with RoHS
3.critical dimension.
- 4.LED Lifetime:50000h.

A  K
LED CIRCUIT DIAGRAM
3.1V@20mA
LUMINANCE 350cd/m²
(TYP)


SCALE A 60:1

**Touch Panel Drawing available on
request, please contact
sales@midasdisplays.com**

DESIGN • MANUFACTURE • SUPPLY



3. BLOCK DIAGRAM

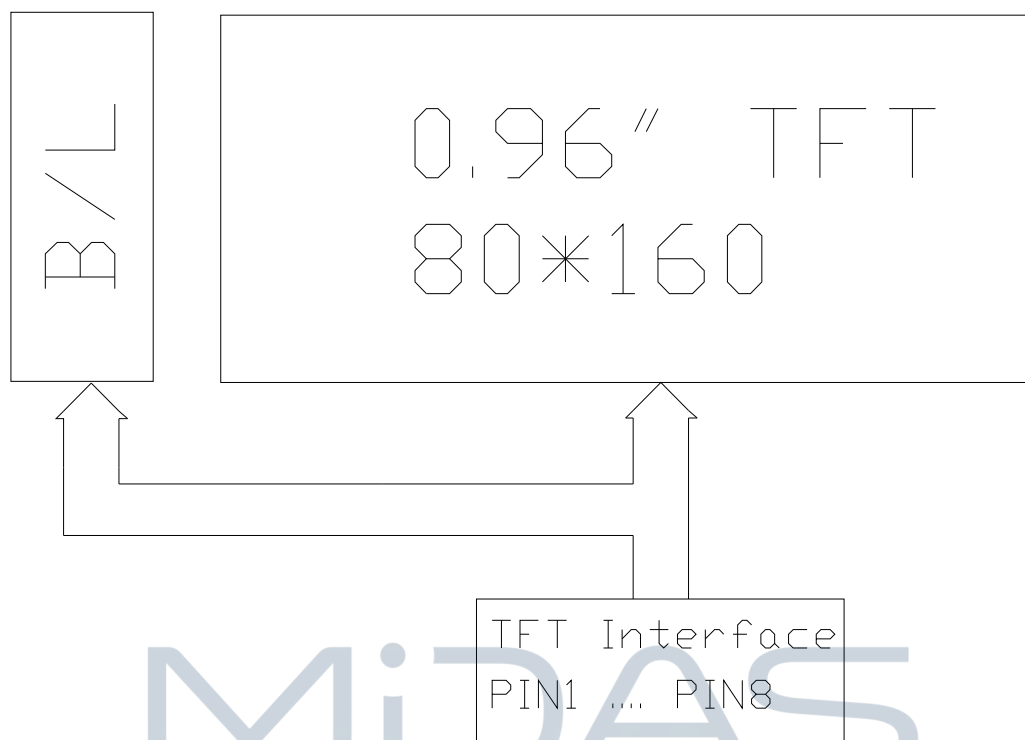

4. PIN ASSIGNMENT


Pin No.	Symbol	Description
1	LEDA	Anode pin of backlight
2	GND	System ground.
3	RESET	System reset pin.
4	D/C	Command / Display data selection 0: command; 1: display data
5	SDA	Data signal for SPI interface
6	SCL	Clock signal for SPI interface.
7	VDD	Power supply.
8	CS	Chip select signal, Active "L"

5. OPTICAL CHARACTERISTICS

ITEM		SYMBOL	CONDITIONS	SPECIFICATIONS			UNIT	NOTE
				MIN	TYP.	MAX		
Luminance		L			350		Cd/m ²	
Contrast ratio		CR	$\theta = 0^\circ$		800			
Response time		$T_R + T_F$	25°C		30	40	ms	
CIE COLOUR COORDINATE	RED	RX	VIEWING NORMAL ANGLE	-0.02	0.610	+0.02		
		RY			0.333			
	GREEN	GX			0.281			
		GY			0.533			
	BLUE	BX			0.146			
		BY			0.138			
	WHITE	WX			0.306			
		WY			0.327			
VIEWING ANGLE	Hor.	θ_{x+}	CR $\geq$ 10		80		Degree	
		θ_{x-}			80			
	Ver.	θ_{y+}			80			
		θ_{y-}			80			




Note 1: Definition of Viewing Angle θ_x and θ_y :

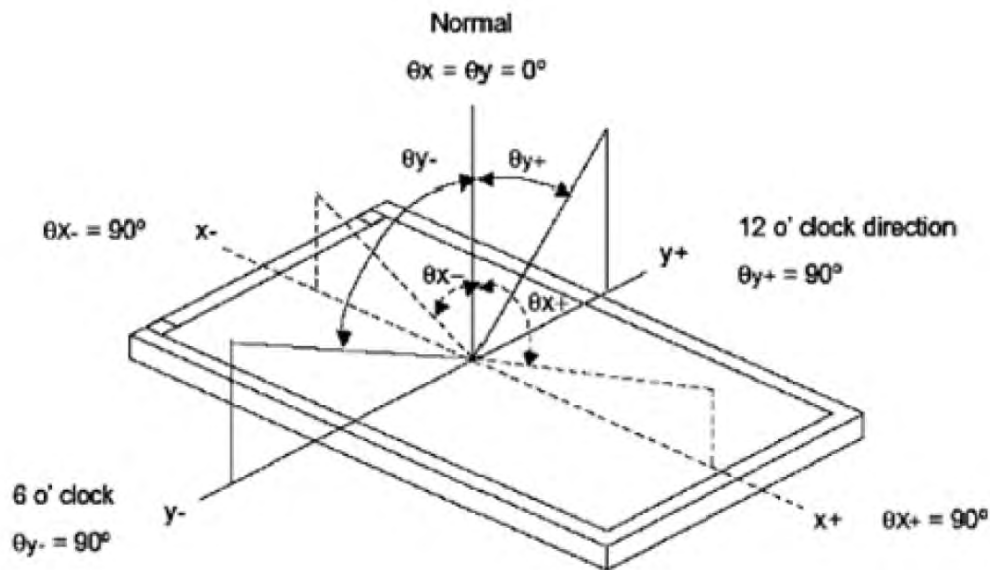

Note 2: Definition of contrast ratio CR:

$$CR = \frac{\text{Luminance of white state}}{\text{Luminance of black state}}$$


Note 3: Definition of Response Time(T_r , T_f)

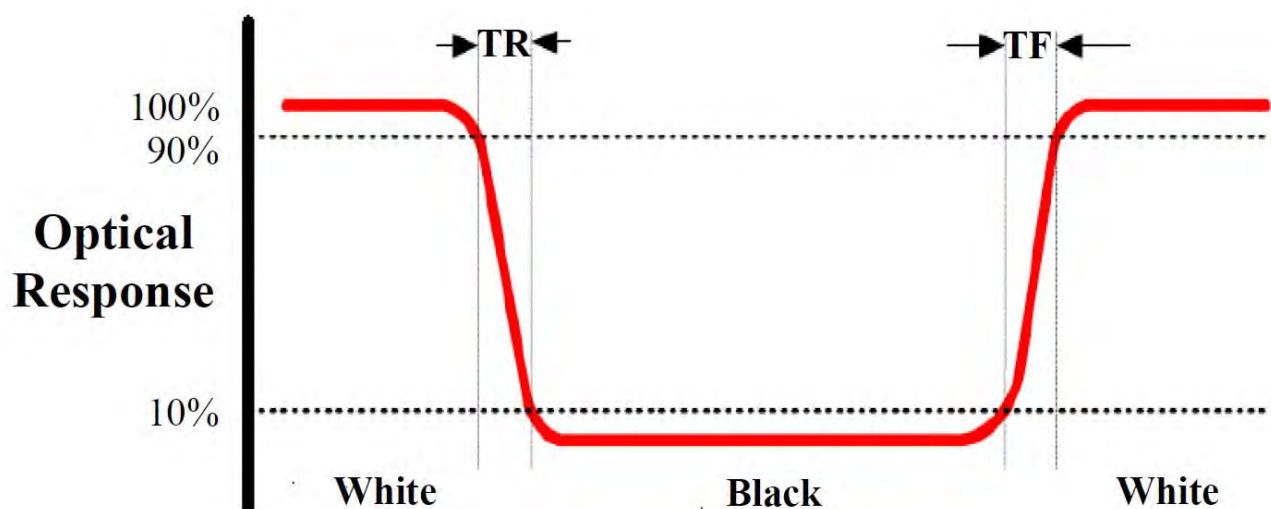


Note 4: Definition of Luminance

①The Brightness Test Equipment Setup

Field=2° (As measuring “black” image, field=2° is the best testing condition)

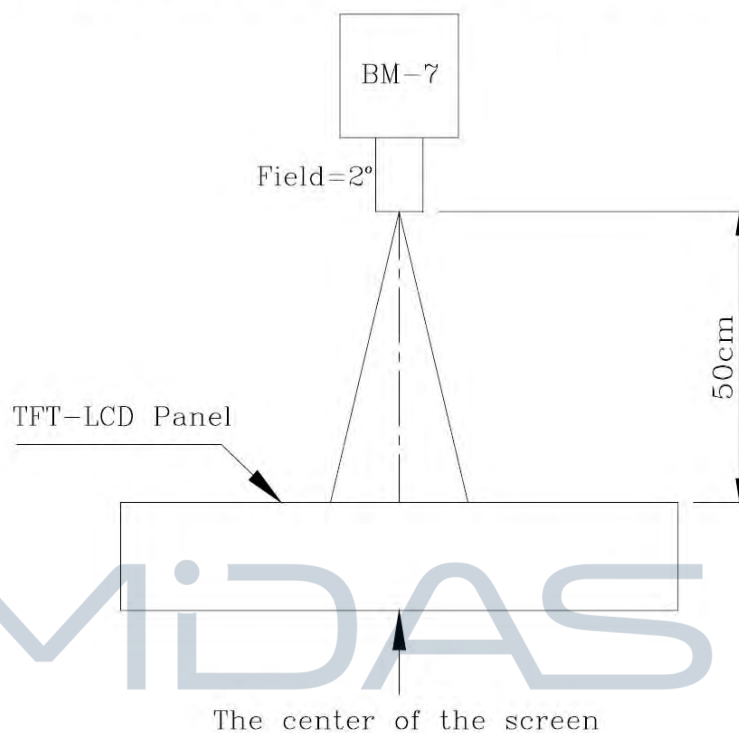

②The Brightness Test Point Setup

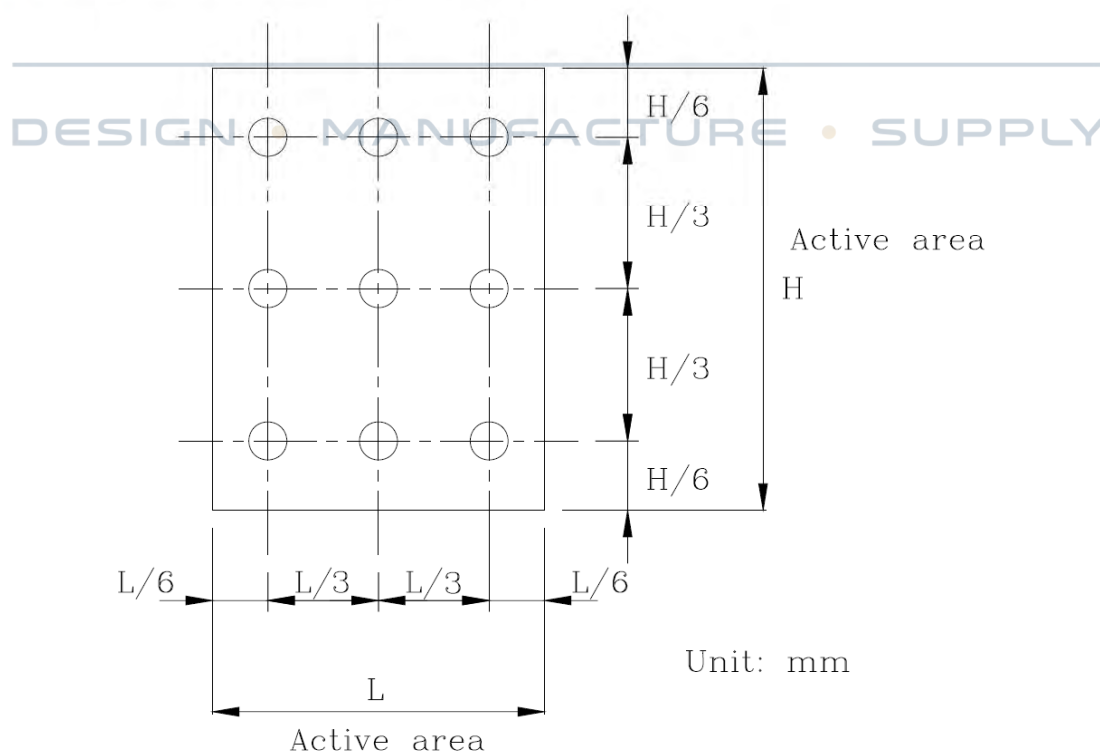

6. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Supply voltage	VDD	-0.3	4.6	V
Operating temperature	T_{OP}	-20	+70	°C
Storage temperature	T_{ST}	-30	+80	°C

Note: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

7. ELECTRICAL CHARACTERISTICS

7.1 Input Power

Item	Symbol	Min	Typ.	Max	Unit	Applicable terminal
Supply voltage	VDD	2.5	2.75	3.7	V	
Input voltage	V_{IL}	GND	-	0.3VDD	V	
	V_{IH}	0.7VDD	-	VDD	V	

7.2 Backlight Driving Conditions


Item	Symbol	Value			Unit	Remark
		Min	Typ.	Max		
Voltage for LED backlight	V_L	-	3.1	-	V	
Current for LED backlight	I_L	-	20	-	mA	
Power consumption	P	-	0.062	-	W	

Note: brightness to be decreased to 50% of the initial value at ambient temperature $T_A=25^{\circ}\text{C}$



8. TIMING CHARACTERISTICS

Serial interface characteristic(4-line Serial)

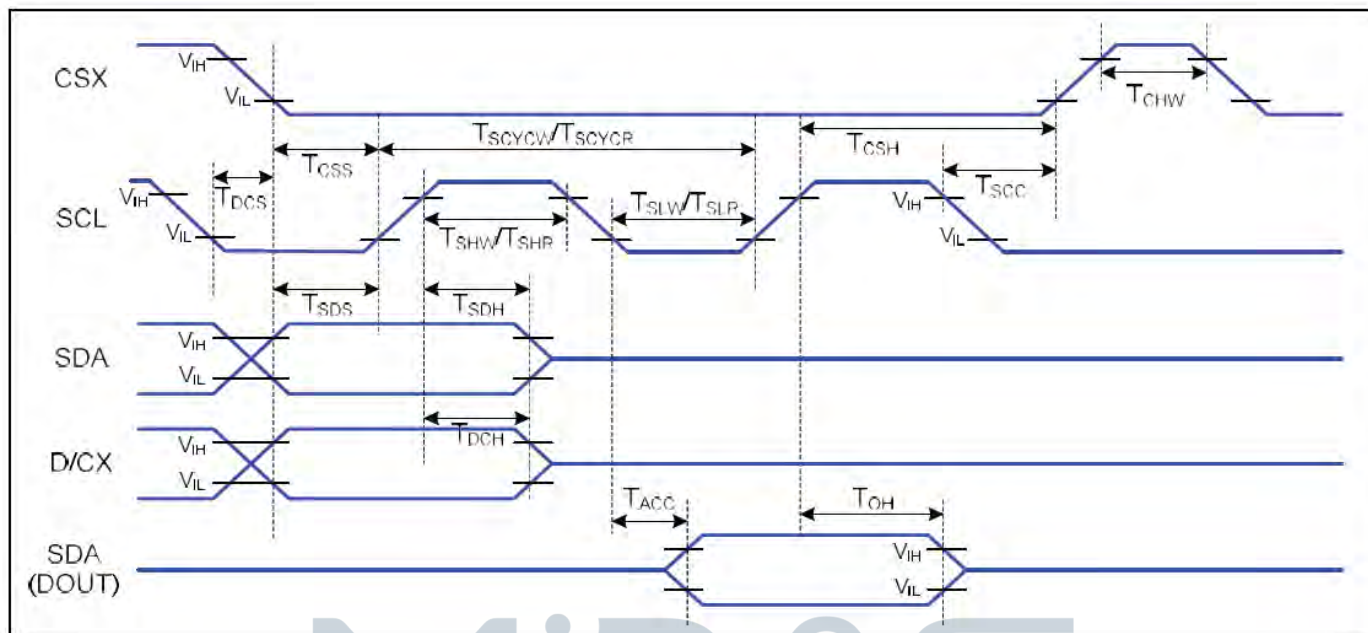

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
CSX	TCSS	Chip Select Setup Time (Write)	45		ns	
	TCSH	Chip Select Hold Time (Write)	45		ns	
	TCSS	Chip Select Setup Time (Read)	60		ns	
	TSCC	Chip Select Hold Time (Read)	65		ns	
	TCHW	Chip Select "H" Pulse Width	40		ns	
SCL	TSCYCW	Serial Clock Cycle (Write)	20		ns	-Write Command & Data Ram
	TSHW	SCL "H" Pulse Width (Write)	10		ns	
	TSLW	SCL "L" Pulse Width (Write)	10		ns	
	TSCYCR	Serial Clock Cycle (Read)	150		ns	-Read Command & Data Ram
	TSHR	SCL "H" Pulse Width (Read)	60		ns	
	TSLR	SCL "L" Pulse Width (Read)	60		ns	
D/CX	TDCS	D/CX Setup Time	10		ns	
	TDCH	D/CX Hold Time	10		ns	
SDA (DIN) (DOUT)	TSDS	Data Setup Time	10		ns	For Maximum CL=30pF For Minimum CL=8pF
	TSDH	Data Hold Time	10		ns	
	TACC	Access Time	10	50	ns	
	TOH	Output Disable Time	15	50	ns	

9. RELIABILITY TEST

NO.	TEST ITEM	CONDITIONS
1	HIGH TEMPERATURE STORAGE	TA=80℃， 240H
2	LOW TEMPERATURE STORAGE	TA=-30℃， 240H
3	HIGH TEMPERATURE OPERATION	TA=70℃， 240H
4	LOW TEMPERATURE OPERATION	TA=-20℃， 240H
5	HIGH TEMPERATURE AND HIGH HUMIDITY OPERATION	+60℃, 90%RH, 240H



DESIGN • MANUFACTURE • SUPPLY



10. LCD MODULES HANDLING PRECAUTIONS

- The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- If the display panel is damaged and the liquid crystal substance inside it leaks out, do not get any in your mouth. If the substance come into contact with your skin or clothes promptly wash it off using soap and water.
- Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarize carefully.
- To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling the LCD module.
 - Tools required for assembly, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
 - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.
- Storage precautions
When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps. Keep the modules in bags designed to prevent static electricity charging under low temperature / normal humidity conditions (avoid high temperature / high humidity and low temperatures below 0°C). Whenever possible, the LCD modules should be stored in the same conditions in which they were shipped from our company.

DESIGN • MANUFACTURE • SUPPLY

11. OTHERS

- Liquid crystals solidify at low temperature (below the storage temperature range) leading to defective orientation of liquid crystal or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subjected to a strong shock at a low temperature.
- If the LCD modules have been operating for a long time showing the same display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. Abnormal operating status can be resumed to be normal condition by suspending use for some time. It should be noted that this phenomena does not adversely affect performance reliability.
- To minimize the performance degradation of the LCD modules resulting from caused by static electricity, etc. exercise care to avoid holding the following sections when handling the modules:
 - Exposed area of the printed circuit board
 - Terminal electrode sections.

